Sl. No.	Items of work	Unit	Quantity
14	R.C.C. beams with 1 : 2 : 4 granite jelly concrete (size of jelly 3/8″ to ½″) and clean sand and reinforcement as per design up to 1½ per cent including centering and curing complete ... ... (Beams will be measured excluding slab thickness)	C.ft.	10,000
15	Do up to 3 per cent reinforcement	,,	5,000
16	R.C.C. columns footings 1 : 2 : 4 proportion with granite jelly 3/8″ to ½″ and clean sand including centering, curing and vibrating with Power Vibrator Reinforcement as per design up to 1·5 per cent ... ... N.B.—When extra percentage of steel is involved, only cost of steel and bending charges as per schedule will be paid as extra.	,,	2,000
17	R.C.C. columns with 1 : 1 : 2 graded jelly concrete (Jelly ¼″ to 3/8″) and clean sand with reinforcement as per design up to 1·5 per cent including centering, curing, complete	C.ft.	2,000
18	Cut stone parapet with cut stone pillasters 10′ intervals as per design for top of parapet (all stones two-line dressed) including scaffolding fixing in cement mortar 1 : 5 pointing and finishing—complete (stones to be got from Hessarghatta quarry only).	R.ft.	2,400
19	Cut stone railing at the top of first floor, all stones, two-line dressed including scaffolding, fixing in cement mortar 1 : 5 and finishing complete, as per design ...	,,	1,500
20	(*a*) Granite stone slabs, 4″ thick, three-line dressed veneering over R.C.C. domes as per design including fixing with cementing materials pointing and finishing at heights 60′ to 80′ (stones to be got from Mallasandra or Hessarghatta quarry only)	S.ft.	10,000
	(*b*) Do at heights 100′ to 150′	,,	5,000

TUMKUR DIVISION.

Notification dated 26th August 1953.

Sealed quotations will be received up to 4 P.M. on 7th September 1953 at the Office of the Executive Engineer, Tumkur Division, Tumkur for the supply of Steel Roof Trusses and Purlins as shown in the undermentioned sketch for the Prayer Hall of the Sree Ramadevaru Temple, Krishnarajendra Extension, Tumkur.

1. The materials should be supplied within one month from the date of acceptance of the quotation.

2. Quotation should be addressed to the Executive Engineer, Tumkur Division, Tumkur., in a sealed cover and be superscribed "Supply of Steel Roof Trusses and Purlins as shown in the undermentioned sketch for the prayer hall of Sree Ramadevaru Temple, Tumkur."

3. Quotation should be accompanied by a treasury chellan for having credited the earnest money of Rs. 100 under Revenue Deposits. After quotations are disposed off, the treasury chellan accompanying the quotation of the unsuccessful quotationer will be returned to him by P.W.D. with an endorsement signed by the Divisional Officer to the effect that the quotation is rejected and the amount of the chellan may be repaid to the party concerned.

4. No dues from the department or cheque will be considered.

5. Specific rates should be quoted for each item of work.

6. Rates quoted will hold good for six months or one year from the date of acceptance of quotation.

7. Rates quoted by the contractor will be considered inclusive of Sales Tax. No separate claims for Sales Tax will be considered.

8. No additional clause will be accepted.

K. V. SIDDABASAVIAH,
Executive Engineer.

STEEL ROOF TRUSS FOR THE PRAYER HALL OF SREE RAMADEVARA TEMPLE, TUMKUR.

Span. 37′–6″c/c.
Rise ... .. 1/6 span.

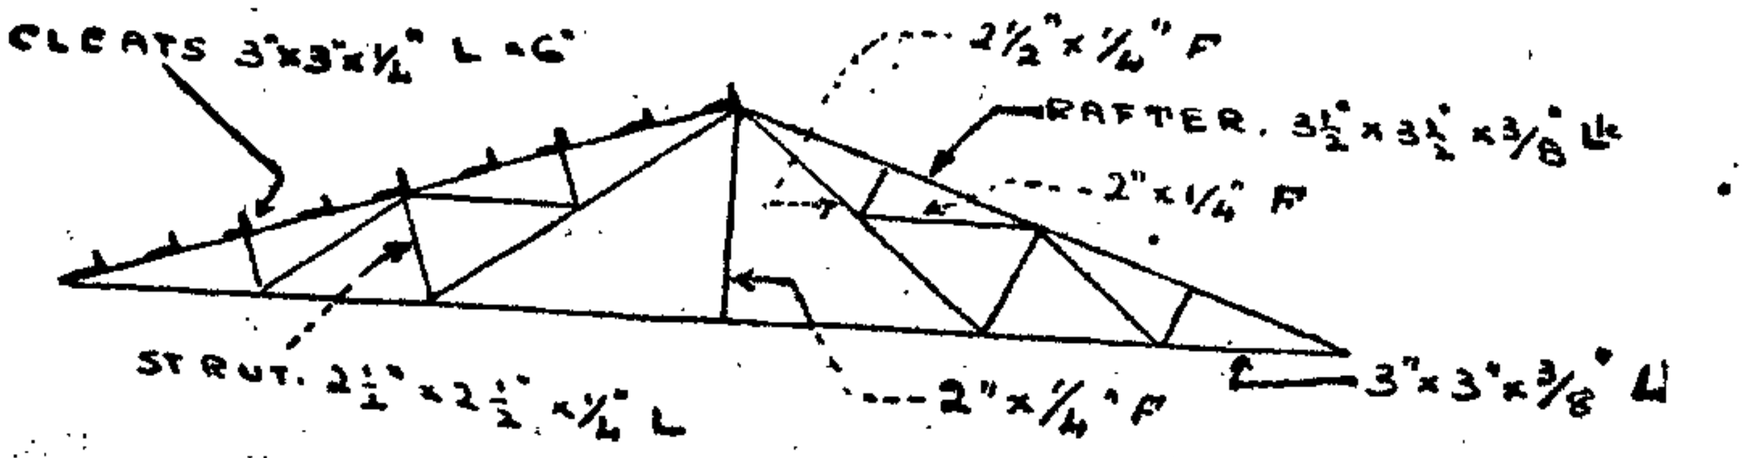

DETAILS.

Truss Rivetted in Halves.

All Rivets and Bolts	...	5/8″ diameter.
All Gussets used	...	¼″ M.S.
Base Plate	...	½″ M.S.
Foundation Bolts	...	1″ diameter × 18″

Approximate weight of Truss = 10 cwts.		
Purlin Cleats	...	3″×3″×¼″L×6″
Purlins	...	3″×3″×¼″L [18 of 60′]
Rise ...	...	1/6 span.
No. of Trusses	...	5

KOLAR DIVISION.

Notification dated 22nd August 1953.

It is hereby notified for the information of the public that the articles mentioned below will be sold in public auction at the premises of the Executive Engineer's Office, Kolar Division, Kolar, 14th September 1953, at 10 A.M. by the Executive Engineer or his authorised representative.

The materials to be auctioned can be inspected at the Divisional Stores Executive Engineer's Office, Kolar, on all working days, between 11 A.M. and 5 P.M.

1	Lorry No. MY 7397 Ford (lease and lend model) 1942		scrapped.
2	Released lorry spares, unserviceable as per list enclosed.		
3	Chevrolet Engine	one old and	unserviceable.
4	Engine	one	Do
5	Gas plant	one set	Do
6	Batteries	2 Nos.	Do
7	Tyres	3 Nos.	wornout and unserviceable.
8	One Ford chassis broken.		

TERMS.

The bidders should pay initial deposit of Rs. 25 each to enable them to bid at the site. Full bid amount should be paid in cash on the spot soon after the bid is closed.

The materials purchased should be removed from the

site immediately after the auction and after payment of full bid amount.

The initial deposit of the unsuccessful bidder will be refunded on the spot. If the party fails to clear the materials after paying the full bid amount within the prescribed time, the deposit of the bidder will be forfeited to Government. The materials will be resold by auction and any losses to Government will be recovered from the bidder as Land Revenue.

The Officer conducting the same will have discretion to accept or reject any bid without assigning any reason for the same.

The mode of auction shall be declared on the date of auction at the spot at the descretion of Sales Officer.

CONDITIONS OF SALES.

1 No person shall be allowed to retract a bid.

2 The biddings shall be regulated by the Officer conducting the sale.

R. A. SAMPATH IYENGAR.
3845 *Executive Engineer.*

MALAVALLI DIVISION, MANDYA.

Abstract Notification dated 18th August 1953.

The attention of the public is invited to the notification calling for tenders in respect of "constructing two R.C.C. Overhead Tanks at Shivapura and Maddur Towns" respectively, published on Pages 1107–8, of Part VI of the *Mysore Gazette*, dated 27th August 1953.

Tenders as prescribed will be received in the Office of the Executive Engineer, Malavalli Division, Mandya, up to 4 P.M. on 14th September 1953.

3949 M. N. RAMAKRISHNA, *Ex. Engr.*

SAGAR DIVISION.

Abstract Notification dated 22nd August 1953.

The attention of the public is drawn to the notification calling for tenders for the construction of a cart bridge across Kerehalla between Begur and Byranahalli, Shikaripur taluk, published in the *Mysore Gazette*, Part VI, page Nos. 1109–10, dated 27th August 1953.

The last date for receipt of the tender is on 26th September 1953.

3861

Notification dated 17th August 1953.

The attention of the public is drawn to the Notifications, calling for tenders for the restoration of Harogoppadakere, a major tank in Sagar Taluk, published in the *Mysore Gazette*, page No. 1109, Part VI, dated 27th August 1953.

The last date for the receipt of tenders is on 7th September 1953.

3860 M. VIJAYADHWAJA RAO, *Ex. Engr.*

MEDICAL DEPARTMENT

OFFICE OF THE MEDICAL OFFICER, ISOLATION HOSPITAL, MAGADI ROAD, BANGALORE CITY.

Abstract Notification dated 20th August 1953.

Notice is hereby given that sealed tenders in triplicate on half-sheet foolscap sized paper will be received by the undersigned in his office on the dates and time noted against each for the supply of articles as detailed below to the above Hospital for the year 1954 from 1st January 1954 to 31st December 1954, both days inclusive. Copies of detailed tender notification can be had at the office of the undersigned on any working day between 8 A.M. and 12 NOON.

1	Bread first quality ...	10 a.m.	Tuesday the 6th October 1953.
2	Pure cows' milk, milked in the Hospital premises.	11 a.m.	
3	Diet articles and Hospital Necessaries.	12 noon.	

D. A. LAKSHMANA RAO,
3782 *Medical Officer.*

OFFICE OF THE SECRETARY, KRISHNARAJENDRA HOSPITAL, MYSORE.

Abstract Tender Notification dated 25th August 1953.

Notice is hereby given for information of the public that sealed tenders in triplicate on half-sheet foolscap sized paper for the supply of the following articles to the Krishnarajendra and Cheluvamba Hospitals, Mysore, from 1st January 1954 to 31st December 1954, will be received by the Secretary, Combined Hospitals, Mysore, in his office at Krishnarajendra Hospital on the date and time mentioned below.

	Name of the article		Date and time of receipt of the tender
1	Diet ingredients	...	On Monday the 5th October 1953 at 10 a.m.
2	Hospital Necessaries	...	
1	Bread	...	On Tuesday the 6th October 1953 at 10 a.m.
2	Milk	...	
3	Country Medicines	...	

L. KALLAIAH,
3791 *Secretary.*

MISCELLANEOUS DEPARTMENTS

OFFICE OF THE DIRECTOR OF AGRICULTURE IN MYSORE, BANGALORE.

Notification dated 1st September 1953.

Subject :—Import of seed potatoes from Simla.

No. H.C.-3-50—53-54. In continuation of this Office Notification No. H.C. 3–50, dated 14th August 1953, published on page 1076, Part VI of the *Mysore Gazette*, dated 20th August 1953, on the above subject, the dealers in potatoes, merchants and agriculturists are informed that the time for sending their applications to this office in connection with the importation of Simlas eed potatoes is extended up to 10th September 1953.

B. P. BALAKRISHNA,
3887 For *Director of Agriculture.*

OFFICE OF THE MUNICIPAL COMMISSIONER, CITY MUNICIPAL OFFICES, MYSORE.

Notification dated 20th August 1953.

No. H.3 P.R. 105—53-54. Sealed tenders are invited by the undersigned for the supply of the materials mentioned below required by the Municipal Commissioner for amelioration of Depressed Class people in Mysore City up to 4 P.M. on Monday the 28th September 1953. The quantities mentioned below are approximate and should be according to the specification noted against each of them. Each tender should be accompanied by a chellan for having deposited a sum of Rs. 200 in the Municipal Treasury as earnest money. The acceptance or rejection of any tender will entirely rest with the undersigned who does not bind himself to assign any reason therefor. Further particulars, if any, may be ascertained from the Municipal Engineer either in person during office hours or by addressing him with necessary stamps for a reply.

1.	Jungle Wood rafters made out of any one of the following varieties of Wood :—Mathi, Nandi Honne, Halasu, Bevu, Bilavaru, Thelasalu, Candacudda 2½"×4" section and in lengths of 8' to 12'.	1,000 C.ft
2.	Jungle Wood reepers made out of any one of the above varieties of Wood 2"×1" section.	1,00,000 R.ft.
3.	Mangalore pattern roofing tiles (First class variety)	50,000
4.	Ridge tiles to suit the above roofing tiles ...	3,000

N. LAKSHMANA RAU,
865 *Municipal Commr.*